




*FlowTop Control Valves*

# FlowTop Control Valves

## Body Assembly

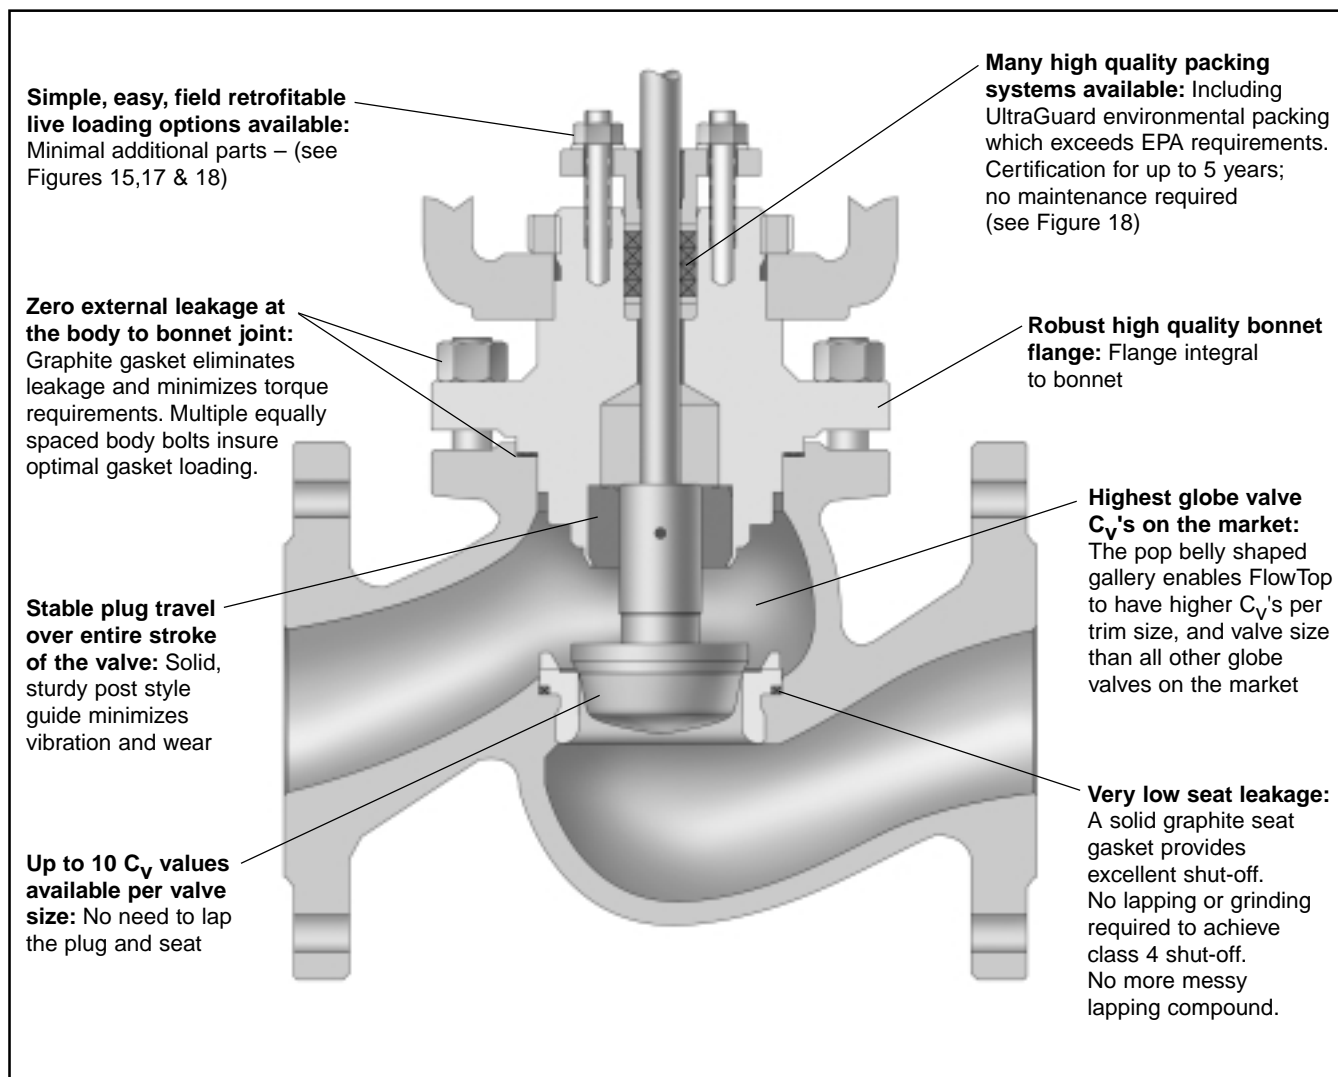

**Figure 1: FlowTop Control Valve Body Assembly**

The FlowTop control valve is a high-performance, general-service valve coupled with the high-thrust FlowAct pneumatic diaphragm actuator.


The Logix 500 positioner is mounted standard on FlowTop control valves. The Logix 500 simplifies and reduces calibration time to 20-seconds or less by pushing two buttons. The easily installed HART compatible positioner make the FlowTop/Logix 500 combination the best choice for general service valve applications. There is no need for additional expensive software or software support and upgrades. Handheld devices are not needed to calibrate this valve, making it the highest performing, low-cost solution for general service valves.

The Pop-belly shaped gallery gives the FlowTop more  $C_v$  than all other Globe valves on the market.

Designed for use in ANSI Class 150 or 300 service applications, the FlowTop control valve is capable of operating within temperatures ranging from -50 to 800° F (-46 to 427° C).

The FlowTop control valve is available in sizes 0.5 to 4-inch with a carbon steel or stainless steel body. It features flow-under, single-seated trim with a post-guided valve stem to eliminate cage-guiding problems. Heavy-duty parts constructed of corrosion-resistant materials provide extended valve life.

# FlowTop Control Valves Actuator Assembly

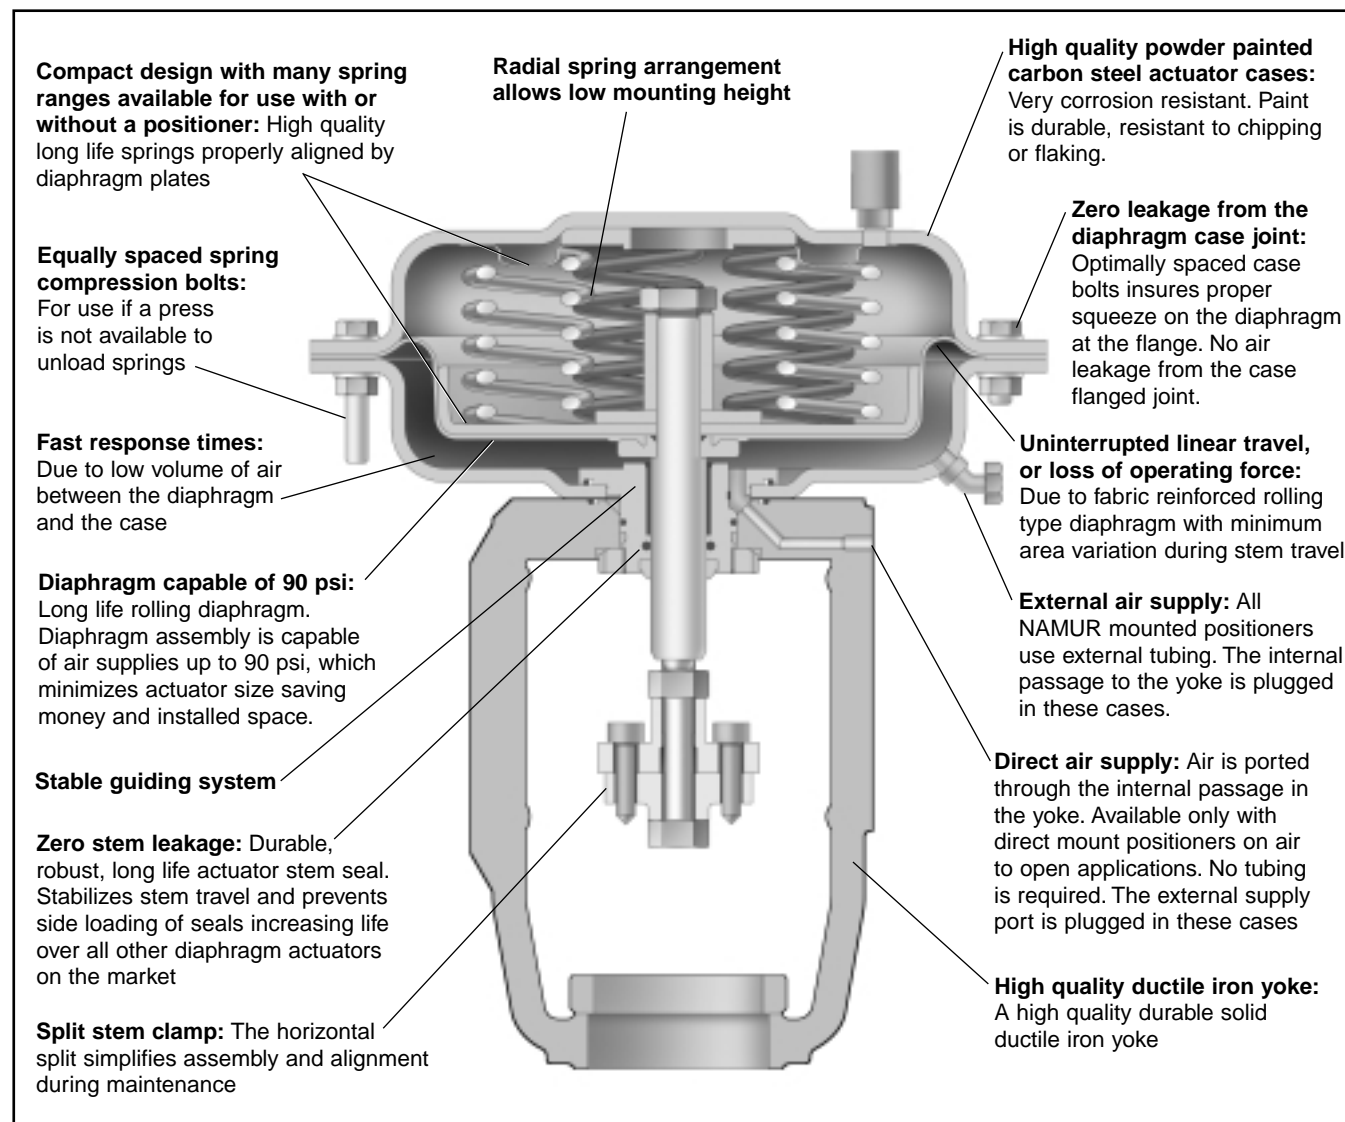

**Figure 2: FlowAct 252 ATO/FC Diaphragm Actuator**

The FlowAct actuator is compact, reversible and capable of accepting air supply pressures up to 90 psi (6.0 bar) allowing the valve to shutoff against high pressure drops.

The FlowTop actuator comes standard with a direct mounted Logix 500 positioner. In all "air to open" applications, no external tubing is required. The direct mount positioner ports air through passages integral to the yoke as illustrated in Figure 2. When the direct mounted positioner is used, the external supply port is plugged. "Air to close" applications require external tubing to the top of the actuator. NAMUR positioner

mounting is also very simple and easy with FlowTop (IEC 534.6). When this mounting standard is used the internal passageway in the yoke is plugged and external tubing is used.

The pneumatic diaphragm actuator can operate in temperatures ranging from -40° to 176° F (-40° to 80° C).

Analog or digital positioners ensure high positioning accuracy proportional to the valve instrument signal.

The FlowTop control valve with the FlowTop pneumatic diaphragm actuator is the solution for most typical general-service valve applications.

# FlowTop Control Valves

## Body and Actuator Assembly

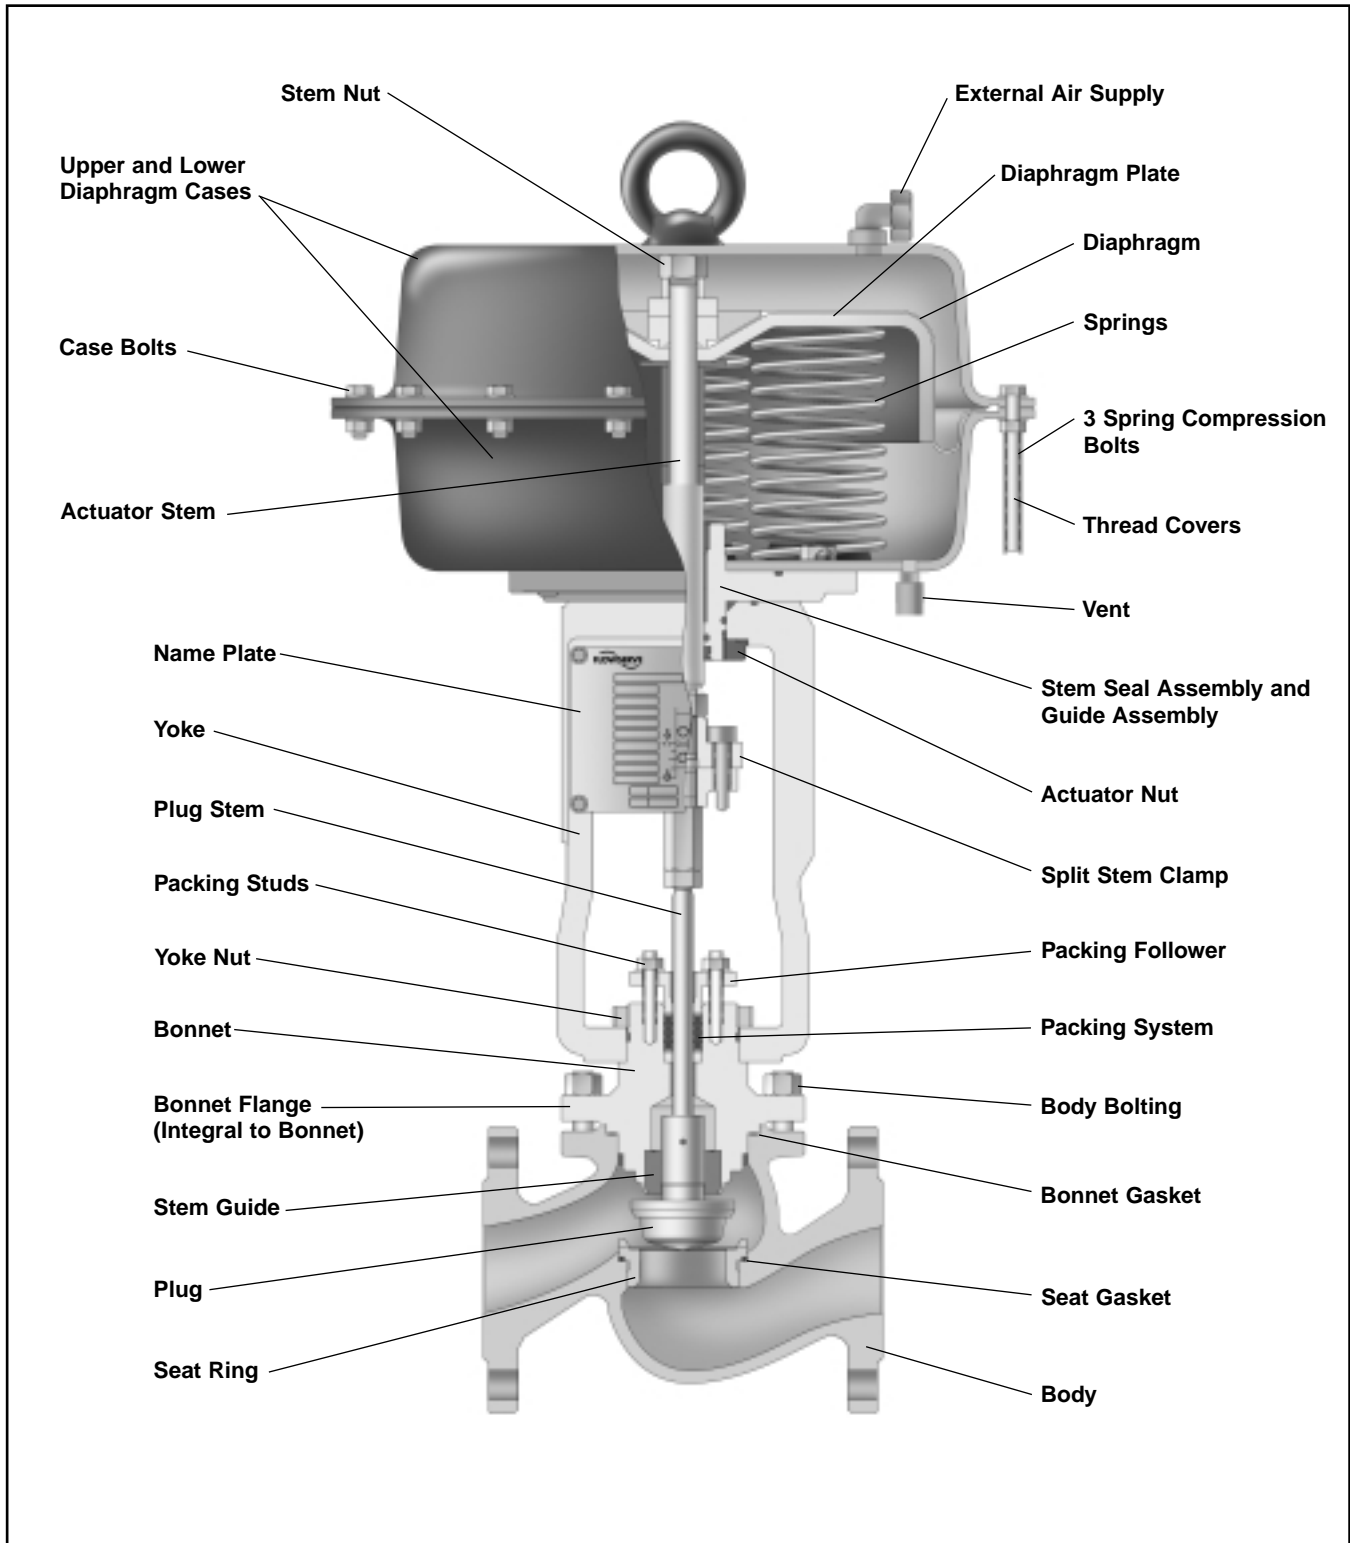


Figure 3: FlowTop Control Valve Assembly

## FlowTop Control Valves

### Features and Advantages

Features	Advantages
Logix 500 Digital Positioner	<p>Logix 500 digital positioner reduces calibration time to 20-seconds by pushing one button</p> <p>Either standard direct or NAMUR (IEC 534.6) positioner mounting available</p> <p>Easy to install, HART compatible positioners make the FlowTop/Logix 500 the best valve/positioner combination for general service needs</p> <p>No software or handheld device is required and can be configured locally</p>
Good Shut-off	FlowTop control valves offers class 4 shut off with out the need for lapping the seating surfaces. Unlike most conventional valves, the FlowTop seat ring has a seat gasket, providing very good shut off.
Post Guiding	<p>Eliminates cage guiding problems</p> <p>One solid sturdy guide stabilizes the stem and plug during entire travel and minimizes vibration and wear.</p>
Low Noise Trim	Silent Pac Low Noise baffle can reduce noise levels generated by vapors and gases
Economical Stainless Steel Bellows Assembly	Bellows assembly used for tough sealing applications, like Dowtherm, steam and others
Compact	Engineered for applications with limited available installation clearance
ANSI Body	Designed for use in ANSI Class 150 and 300 service, flanged applications
Easy Maintenance	Bonnet design allows for quick, top-entry service. The valve body can remain in line while trim is changed or replaced.
Versatile Packing Configuration	Available sets include single PTFE V-ring, PTFE braid and graphite. Live loading kits are available (see Figures 13 to 20).
Fugitive Emission Packing	High quality "Ultra seal" environmental packing is available: Exceeds EPA standards of 500 ppm (see Figure 18).
Long-life Operation	Heavy-duty parts provide extended life, corrosion-resistant construction
Many Positioning Options	The valve can be equipped with a high-performance analog or digital positioner or function without a positioner on air signal alone.
Wide Variety of Trim Sizes and Materials	Up to 10 C <sub>v</sub> values per valve size and many material options
High-thrust Diaphragm Actuator	Compact, light weight, capable of 90 psi (6.0 bar) air supply; multiple spring combinations. Reduces installation size and initial expense.
Dynamic Stability	Sturdy guiding system stabilizes plug travel
Reversible Actuator	Failure mode is easily reversed, using common tools
NAMUR Mounting (IEC 534.6) (as an option)	<p>Easy positioner mounting with universal NAMUR mounting kit</p> <p>Support for products such as limit switches and position transmitters are easily mounted on the same NAMUR positioner bracket</p>
Many Available Options	Top-mounted handwheel, digital positioners, position transmitter, limit switches, proximity switches, and solenoids. (See <i>Performance!</i> software for specific details.)
Multiple Applications Usage	High-performance, general-service control valve used in many process industries including chemical, refinery, power, food and beverage, HVAC, and OEM

## FlowTop Control Valves

### Materials of Construction

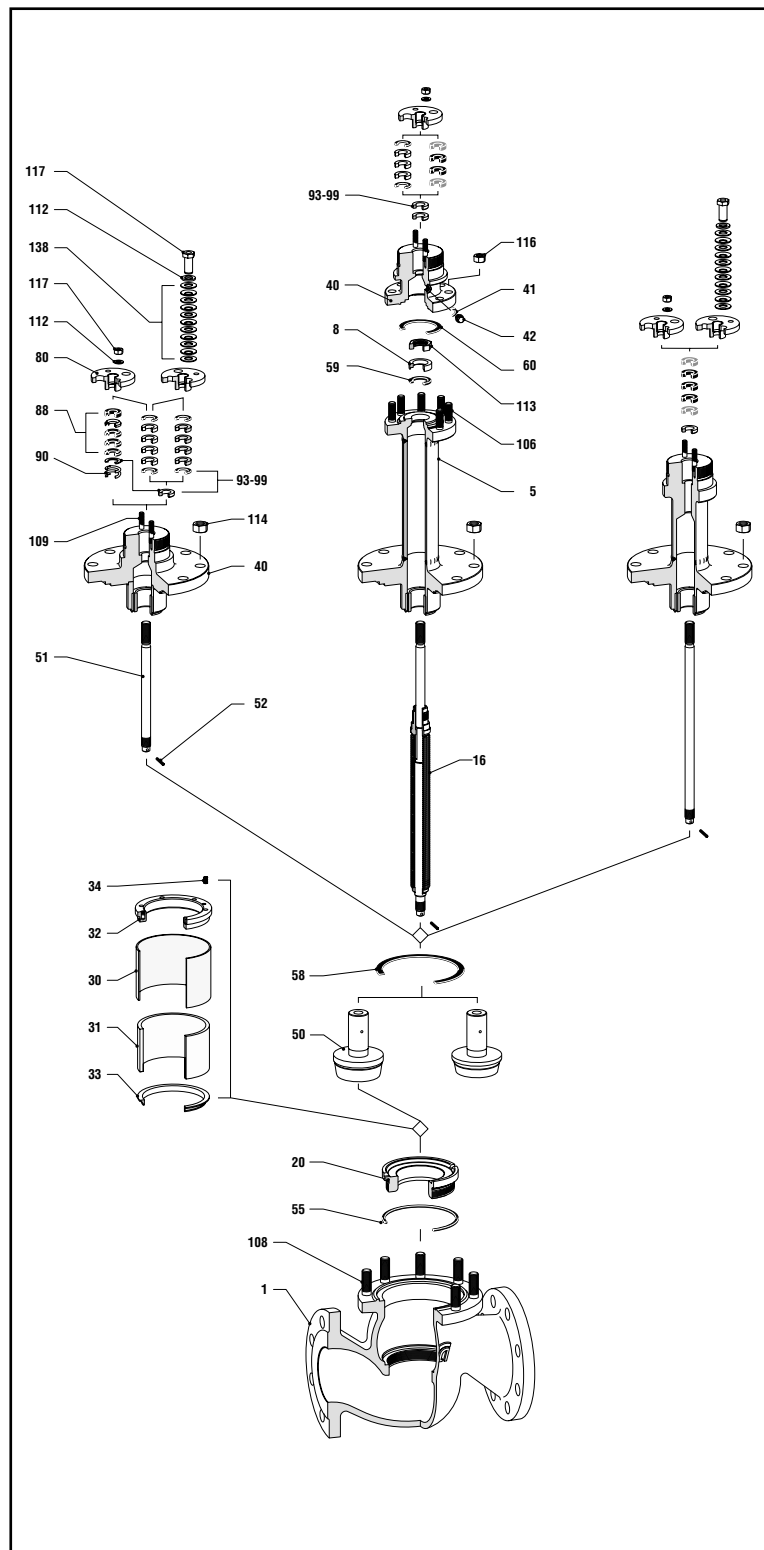



Figure 4: FlowTop

Table 1: Parts List


BOM	Designation	Materials	
1	Body	A216WCB	A351 CF8M
5	Bellows Housing	A105	A 182 F 316 L
6	MBS Seal Assembly	316 SS	
20	Seat Ring	316 SS	
30	Multi-hole Stage	1.4571	
31	Wire Netting	1.4404 (SS)	
32	Upper Retaining Ring	1.4571	
33	Ring, Lower	316 SS	
34	Spring, Silent Pack	1.4310	
40	Standard Bonnet	A105	A 182 F 316 L
40	Extended Bonnet		
40	MBS Bonnet	A	A 182 F 316 L
41	Gasket Purge Plug	Pure Graphite	
42	Purge Plug	A2 (SS)	
50	Plug Head	316 SS	
51	Stem		
52	Spring Pin	A2 (SS)	
55	Seat Gasket	Pure Graphite	
59	MBS Gasket	Pure Graphite	
60	MBS Gasket	Pure Graphite	
80	Gland Flange	316	
88	Packing Box Unloaded	PTFE-Pure-Graphite	
	Loaded	PTFE-Rings Pure-Graphite	
90	Pressure Spring	1.4571 (SS)	
93-99	Packing Spacer	1.4571 (SS)	
106	Stud	A193	A193 B8 M2
108	Stud	A193	A193 B8 M2
109	Stud, Packing Box	A193 B8 M2	
117	Hex Nut	316	
112	Plain Washer	A2 (SS)	
112	Plain Washer	316	
113	Jam Nut	316 SS	
114	Hex Nut	A194 3	A194 8 M
116	Hex Nut		
117	Nut, Packing Box	A194 8 M	
138	Belleville Spring	A2 (SS)	




## FlowTop Control Valves Options

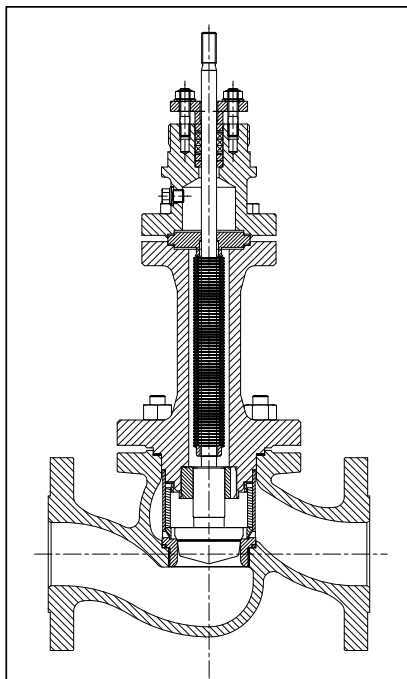


**Figure 5: Bellow 2 inches and smaller (shown with a Silent Pac Low Noise Baffle)**

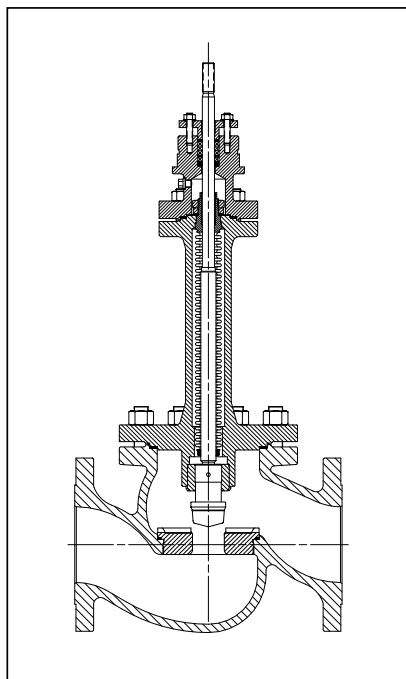


**Figure 6: Bellow 3-4 inches**

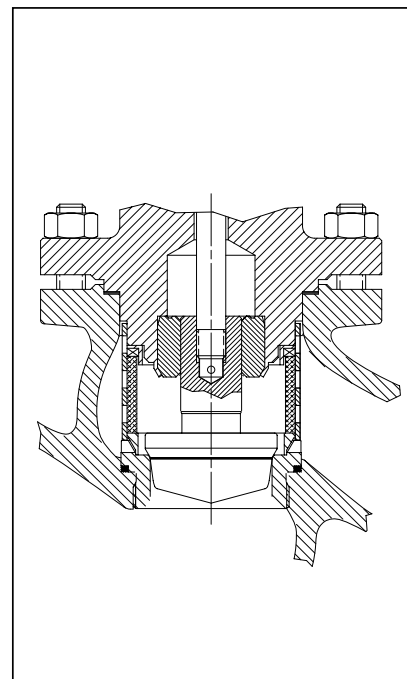


**Figure 7: Silent Pac Low Noise Baffle used for gases and vapors**

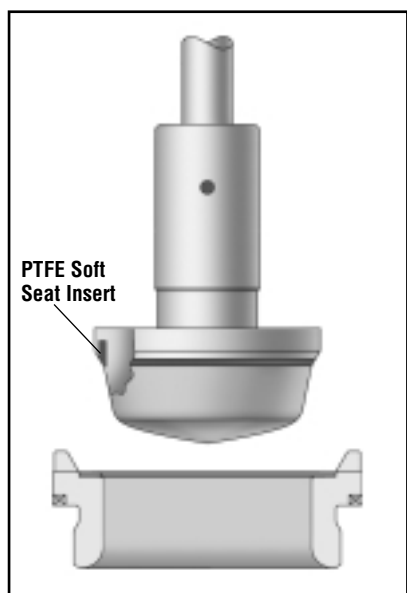

**Figure 8: PTFE Soft Seat**  
(Minimum Trim Number is 0.24 inches [6 mm])

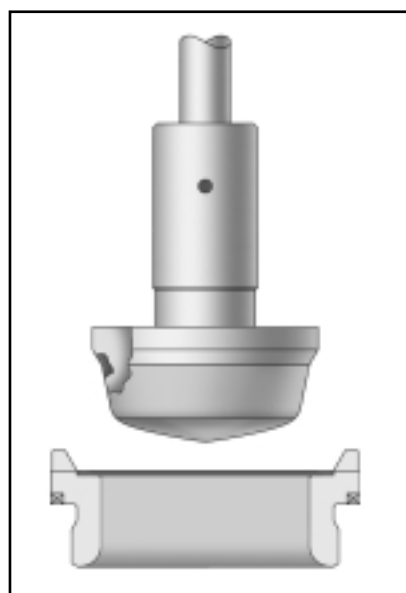

**Figure 9: Standard Trim with Alloy 6 Seat-surface Overlay**

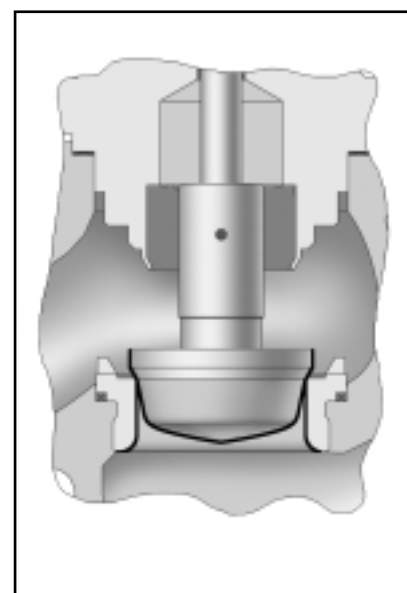

**Figure 10: Trim with Alloy 6 Full-contour Overlay**

## FlowTop Control Valves

### Body Specifications and Design Options

**Table 2: Valve Body Specifications**


Style	Top-entry, single-seated, straight-through globe valve
Sizes	0.5 to 4-inch, ANSI Class 150-300 Flanged
End connection	ISA 75.03
Integral flange	
Surface finish	Standard: 125 – 250 Ra Optional: 250 – 500 Ra
Bonnet	Standard, extended and bellows seal
Packing	PTFE V-ring, braided PTFE, graphite, UltraGuard environmental packings systems
Trim flow characteristics	Linear, equal percentage, quick-open; unbalanced
Leakage rates	ANSI Class IV, VI (with soft seat option) Minimum trim number with soft seat is 0.24 inches

### Design Options

Unlike other general service valves, the FlowTop control valve offers a number of design and accessory options – including a versatile packing box with numerous packing configurations, fugitive emission option, multiple actuator spring configurations, top-mounted hand wheels, and a wide range of digital analog or positioners.



**Figure 11: FlowTop with a NAMUR mounted Logix 500 digital positioner – local calibration, no need of handheld device or software**

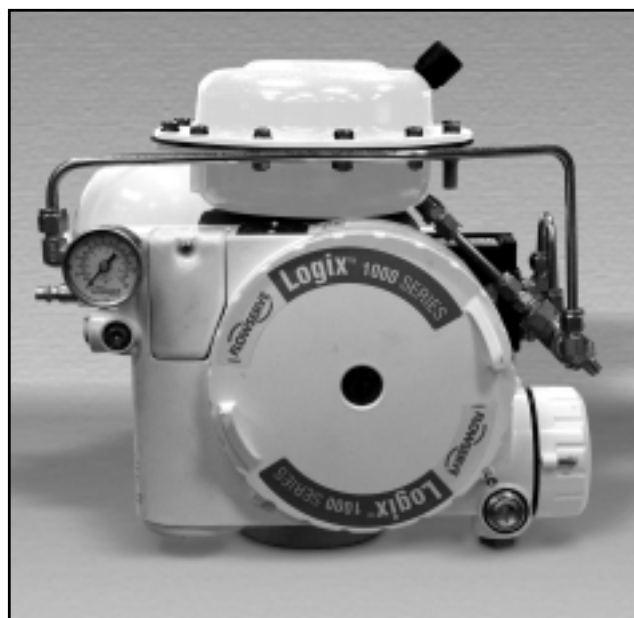

**Figure 12: FlowTop with a NAMUR mounted Logix 1000 digital positioner – local calibration, no need of handheld device or software**



# FlowTop Control Valves

## C<sub>V</sub> Tables

Table 3: C<sub>V</sub> values for Modified Equal Percent

Valve Size Inches	Trim Number		Stroke		C <sub>V</sub> 100%	
	Inches	mm	Inches	mm	C <sub>V</sub>	K <sub>VS</sub>
0.5	0.63	16	0.787	20	6.5	5.6
	0.47	12	0.787	20	4.6	4
	0.39	10	0.787	20	2.9	2.5
	0.31A	8	0.787	20	1.8	1.6
	0.31B	8	0.787	20	1.16	1
	0.24	6	0.787	20	0.73	0.63
	0.16A	4	0.787	20	0.47	0.4
	0.16B	4	0.787	20	0.29	0.25
	0.16C	4	0.787	20	0.19	0.16
	0.98	25	0.787	20	16.2	14
1	0.79	20	0.787	20	11.6	10
	0.63	16	0.787	20	7.3	6.3
	0.47	12	0.787	20	4.6	4
	0.39	10	0.787	20	2.9	2.5
	0.31A	8	0.787	20	1.8	1.6
	0.31B	8	0.787	20	1.16	1
	0.24	6	0.787	20	0.73	0.63
	0.16A	4	0.787	20	0.46	0.4
	0.16B	4	0.787	20	0.29	0.25
	0.16C	4	0.787	20	0.18	0.16
1.5	1.57	40	0.787	20	36	31.5
	1.34	34	0.787	20	29	25
	0.98	25	0.787	20	18.5	16
	0.79	20	0.787	20	11.6	10
	0.63	16	0.787	20	7.3	6.3
2	1.97	50	0.787	20	55	47.5
	1.65	42	0.787	20	46	40
	1.57	40	0.787	20	36	31.5
	1.34	34	0.787	20	29	25
	0.98	25	0.787	20	18.5	16
3	3.15	80	1.57	40	145	125
	2.64	67	1.57	40	116	100
	2.09	53	1.57	40	73	63
	1.65	42	1.57	40	46	40
	1.34	34	1.57	40	29	25
4	3.94	100	1.57	40	208	180
	3.31	84	1.57	40	187	160
	2.64	67	1.57	40	116	100
	2.09	53	1.57	40	73	63

Table 4: C<sub>V</sub> values for Linear

Valve Size Inches	Trim Number		Stroke		C <sub>V</sub> 100%	
	Inches	mm	Inches	mm	C <sub>V</sub>	K <sub>VS</sub>
0.5	0.63	16	0.787	20	6.5	5.6
	0.47	12	0.787	20	4.6	4
1	0.98	25	0.787	20	16.2	14
	0.79	20	0.787	20	11.6	10
1.5	0.63	16	0.787	20	7.3	6.3
	0.47	12	0.787	20	4.6	4
2	1.57	40	0.787	20	36	31.5
	1.34	34	0.787	20	29	25
3	0.98	25	0.787	20	18.5	16
	0.79	20	0.787	20	11.6	10
4	0.63	16	0.787	20	7.3	6.3
	1.97	50	0.787	20	55	47.5
1.5	1.65	42	0.787	20	46	40
	1.57	40	0.787	20	36	31.5
2	1.34	34	0.787	20	29	25
	0.98	25	0.787	20	18.5	16
3	0.79	20	0.787	20	11.6	10
	3.15	80	1.57	40	145	125
4	2.64	67	1.57	40	116	100
	2.09	53	1.57	40	73	63

Table 5: C<sub>V</sub> values for Quick Open

Valve Size Inches	Trim Number		Stroke		C <sub>V</sub> 100%	
	Inches	mm	Inches	mm	C <sub>V</sub>	K <sub>VS</sub>
0.5	0.63	16	0.787	20	7.3	6.3
1	0.98	25	0.787	20	18.5	16
1.5	1.57	40	0.787	20	41	35.5
2	1.97	50	0.787	20	61	53
3	3.15	80	1.57	40	162	140
4	3.94	100	1.57	40	231	200

Table 6: Silent Pac C<sub>V</sub> values for Modified Equal Percent


Valve Size Inches	Trim Number		Stroke		C <sub>V</sub> 100%	
	Inches	mm	Inches	mm	C <sub>V</sub>	K <sub>VS</sub>
0.5	0.63	16	0.787	20	6.5	5.6
	0.47	12	0.787	20	4.7	4
	0.39	10	0.787	20	2.9	2.5
	0.31A	8	0.787	20	1.9	1.6
	0.31B	8	0.787	20	1.16	1
	0.24	6	0.787	20	0.73	0.63
	0.98	25	0.787	20	14.6	12.5
	0.79	20	0.787	20	11.6	10
	0.63	16	0.787	20	7.3	6.3
	0.47	12	0.787	20	4.7	4
1	0.39	10	0.787	20	2.9	2.5
	0.31A	8	0.787	20	1.8	1.6
	0.31B	8	0.787	20	1.16	1
	0.24	6	0.787	20	0.73	0.63
	1.57	40	0.787	20	26	22.5
	1.34	34	0.787	20	23	20
	0.98	25	0.787	20	18.7	16
	0.79	20	0.787	20	11.6	10
	0.63	16	0.787	20	7.3	6.3
	1.97	50	0.787	20	41	35.5
2	1.65	42	0.787	20	37	31.5
	1.34	34	0.787	20	29	25
	0.98	25	0.787	20	18.5	16
	0.79	20	0.787	20	11.6	10
	3.15	80	1.57	40	117	100
	2.64	67	1.57	40	105	90
	2.09	53	1.57	40	73	63
	1.65	42	1.57	40	46	40
	3.94	100	1.57	40	145	125
	3.31	84	1.57	40	145	125
3	2.64	67	1.57	40	116	100
	2.09	53	1.57	40	73	63
	1.65	42	1.57	40	46	40
	3.94	100	1.57	40	145	125
	3.31	84	1.57	40	145	125
	2.64	67	1.57	40	116	100
	2.09	53	1.57	40	73	63

Table 7: Silent Pac C<sub>V</sub> values for Linear


Valve Size Inches	Trim Number		Stroke		C <sub>V</sub> 100%	
	Inches	mm	Inches	mm	C <sub>V</sub>	K <sub>VS</sub>
0.5	0.63	16	0.787	20	6.5	5.6
	0.47	12	0.787	20	4.6	4
1	0.98	25	0.787	20	14.7	12.5
	0.79	20	0.787	20	11.6	10
1.5	0.63	16	0.787	20	7.3	6.3
	0.47	12	0.787	20	4.6	4
2	1.57	40	0.787	20	26	22.4
	1.34	34	0.787	20	23	20
3	0.98	25	0.787	20	18.5	16
	0.79	20	0.787	20	11.6	10
4	0.63	16	0.787	20	7.3	6.3
	1.97	50	0.787	20	41	35.5
1.5	1.65	42	0.787	20	37	31.5
	1.34	34	0.787	20	29	25
2	0.98	25	0.787	20	18.5	16
	0.79	20	0.787	20	11.6	10
3	3.15	80	1.57	40	117	100
	2.64	67	1.57	40	105	90
4	2.09	53	1.57	40	73	63
	1.65	42	1.57	40	46	40
1.5	3.94	100	1.57	40	145	125
	3.31	84	1.57	40	145	125
2	2.64	67	1.57	40	116	100
	2.09	53	1.57	40	73	63

## FlowTop Control Valves Packing


### Non-Environmental Packing

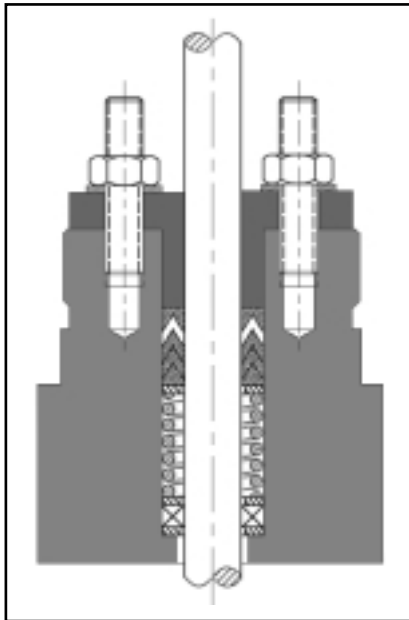

**Figure 13:**  
**V-ring Standard Bonnet**  
*(Internal Live-loading Shown)*

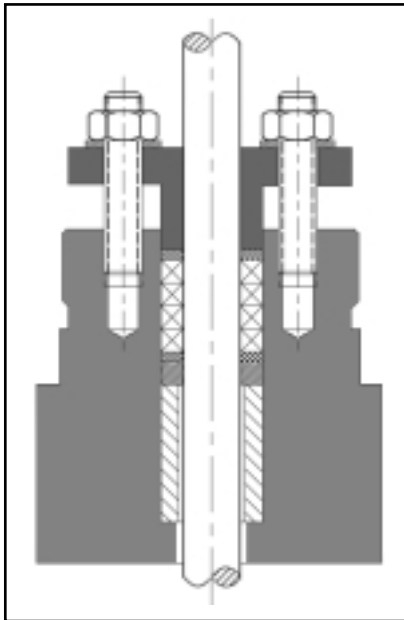


**Figure 14:**  
**PTFE Ring Standard Bonnet**

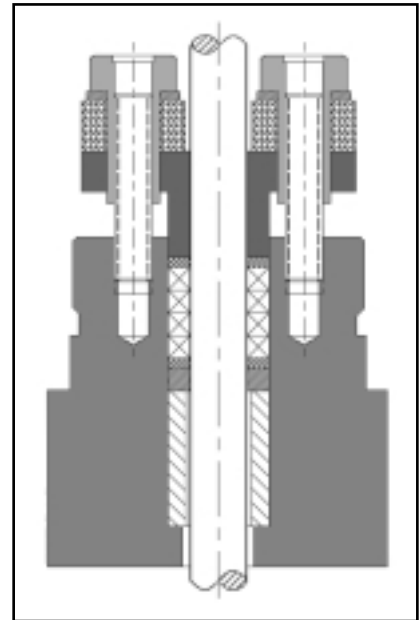


**Figure 15:**  
**PTFE Ring Standard Bonnet**  
*(Externally Live-loaded)*

### Extended Bonnet (Packing configuration only – extension not shown)

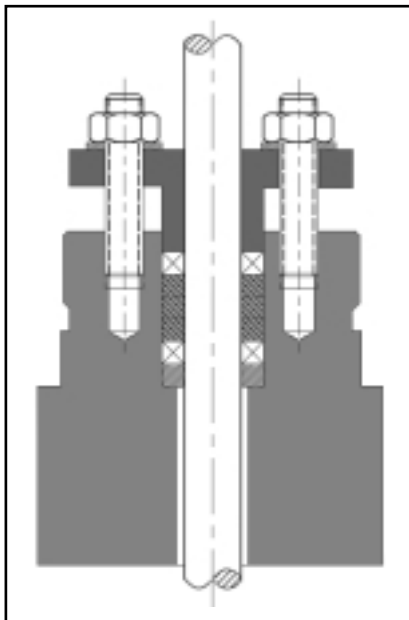


**Figure 16:**  
**Graphite Ring**

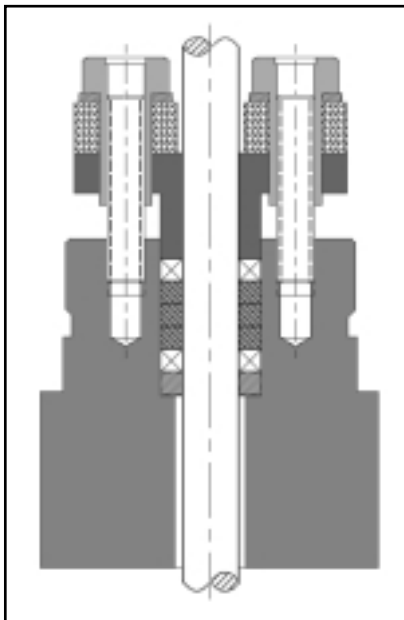

**Figure 17:**  
**Graphite Ring**  
*(Externally Live-loaded)*


## FlowTop Control Valves Packing

### Environmental Packing

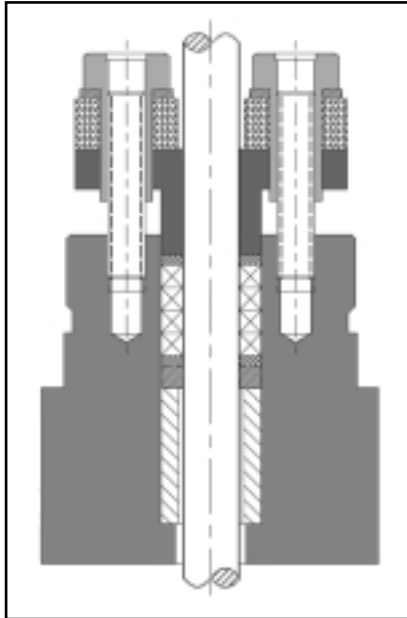


**Figure 18:**  
UltraGuard Standard Bonnet  
(Externally Live-loaded)

### Bellows Packing (Bellows assembly and purge not shown)

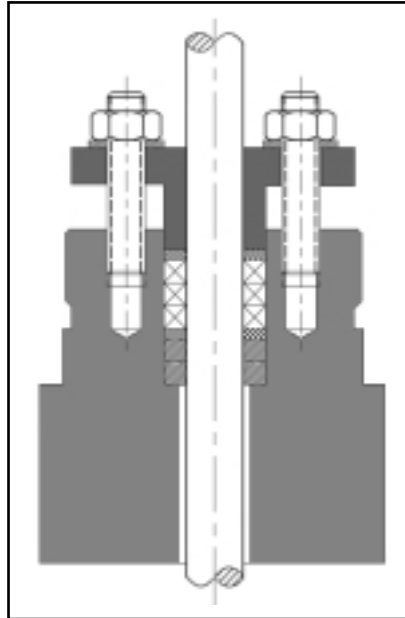

**Figure 19:**  
PTFE Ring Bellows Bonnet

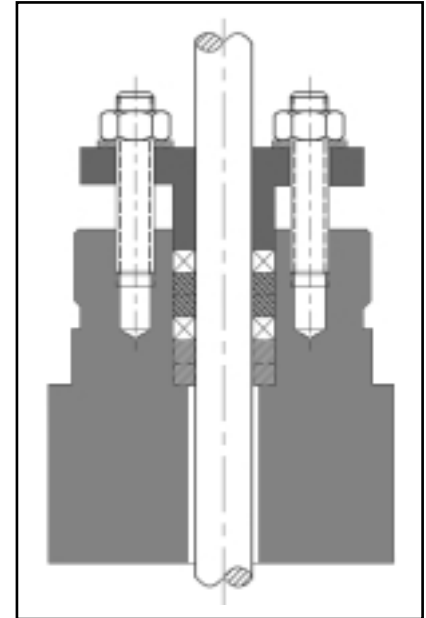

**Figure 20:**  
Graphite Ring Bellows Bonnet

**Table 8: Schmidt Control Valve Packing Selection Guidelines**

Packing System	Packing Type and Packing Material	Temperature Range¹						Options Available	Relative Friction Level²	Relative Expected Service Level²
		Standard Bonnets		Extended Bonnets		Bellows Bonnets				
		°F	°C	°F	°C	°F	°C			
Standard V-ring	V-ring Carbon Filled PTFE	14 to 350°	-10 to 177°	-50 to 480°	-46 to 250°	NA	NA	Live-loading⁴	.10	.85
PTFE Ring	Square-braided, PTFE	14 to 480°	-10 to 250°	-50 to 480°	-46 to 250°	-50 to 480°	-46 to 250°	Live-loading	.35	1
Graphite Ring³	Die-formed Graphite rings, Pure Graphite	NA	NA	200 to 800°	93 to 427°	400 to 752°	204 to 400°	Live-loading	.70	.50
UltraGuard (TA Luft Latty)	PTFE Coated, Braided Graphite	14 to 480°	-10 to 250°	-50 to 480°	-46 to 250°	NA	NA	Live-loading	.35	1

<sup>1</sup> Temperatures based on valve body temperature limits. Exceeding these limits may increase leakage and decrease service life.

<sup>2</sup> Normalized index where 1.0 represents highest relative leakage, friction, or longest relative packing life.

<sup>3</sup> The temperature of graphite packing should not exceed 800° F (427° C) in an oxidizing service such as air.

<sup>4</sup> Both internal and external live-loading is available for this packing set.

**Note:** Temperature limits in carbon steels range from -15 to 800° F (-26 to 427° C).

# FlowTop Control Valves

## Actuator Data

### Top-mounted Handwheel

127, 252 and 500 size actuators use the Top light Handwheel. The size 700 actuator uses only the Heavy style handwheel

### Positioners

**Digital:** Flowserve's Logix 500/HART or Logix 1000 series/HART or FOUNDATION fieldbus digital positioners utilize built-in microprocessors and electronic relays to facilitate quick, accurate response to both large and small changes in position command. Both units offer self-contained, on-board diagnostics.

**Electro-pneumatic:** Beta and XL Positioners with an I/P can receive a 4 to 20 mA input signal which is converted into a pneumatic output signal. It is vibration

resistant, reversible, intrinsically safe, explosion-proof, and easy to adjust. (Figure 24).

### Additional Accessories

**Electro-pneumatic transducer:** Converts a 4-20 DC milliampere signal into a proportional pneumatic output pressure of 3 to 15 psi (0.2 to 1.0 bar).

**Position transmitter/limit switch assemblies:** Position transmitters & limit switch options mount on the same NAMUR bracket as the positioner. Mounting hardware is similar. They can provide proportional feed back or on/off signals. They can signal lights, alarms, relays, etc. Available options include: UltraSwitch models, Position Pac Series, GO and P&F proximity switches. (See *Performance!* software for details.)

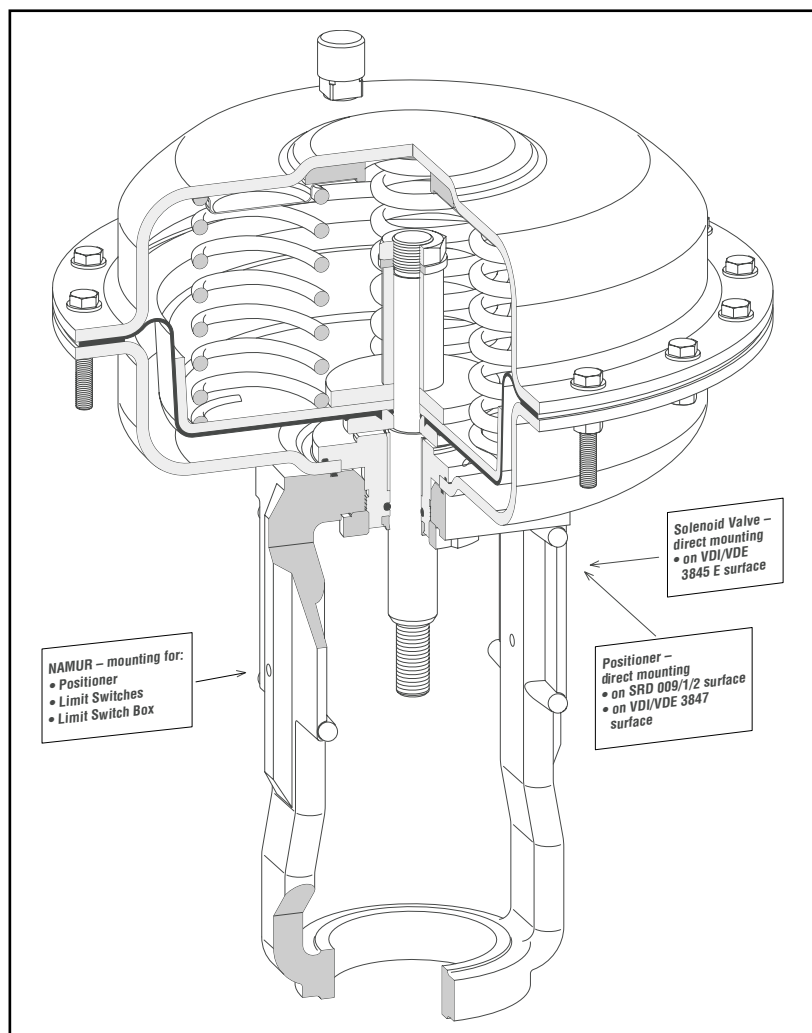


Figure 21: Pneumatic Linear Actuator with Direct-mounting Yoke

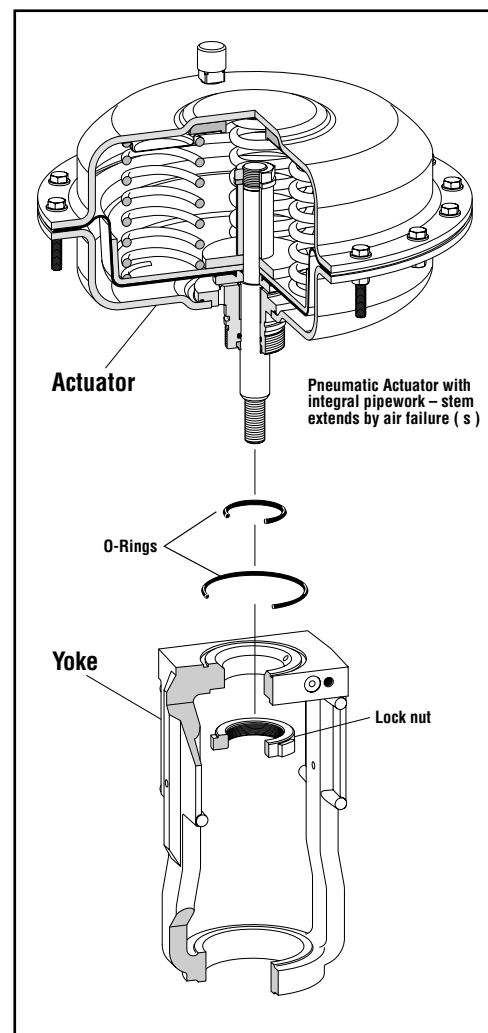


Figure 22

# FlowTop Control Valves


## Actuator Data

**Table 9: Parts List**

Part	Designation	Materials
203	Diaphragm Casing	1.0322 <sup>2</sup>
202	Diaphragm Casing	1.0322 <sup>2</sup>
335, 336	Hexagon Bolt	A2-70
351	Hexagon Nut	A2-70
337	Plain Washer	A2
257	Guide Bush	1.0736 <sup>1</sup>
	Plain Bearing	-
271	O-Ring	NBR 70
275	O-Ring	NBR 70
273	Scraper Ring	NBR 90
211	Stem	1.4571
253	Spacer Bush	1.0308 <sup>1</sup>
228	Disk	1.0736 <sup>1</sup>
227	Diaphragm Plate	1.0332 <sup>1</sup>
225	Diaphragm	NBR 60
272	O-Ring	NBR 70
260	Thrust Washer	1.0736 <sup>1</sup>
349	Lock Washer	Federstahl
348	Hexagon Nut	17H <sup>1</sup>
229, 230	Actuator Spring	1.7102
231	Distance Plate <sup>3</sup>	1.0736 <sup>1</sup>
326	Spring Adjusting Plate	1.0330.03 <sup>1</sup>
258	Vent Plug	Polyamid

<sup>1</sup> chromatised acc. to DIN 50 961 Fe/Zn 12C

<sup>2</sup> powder coating

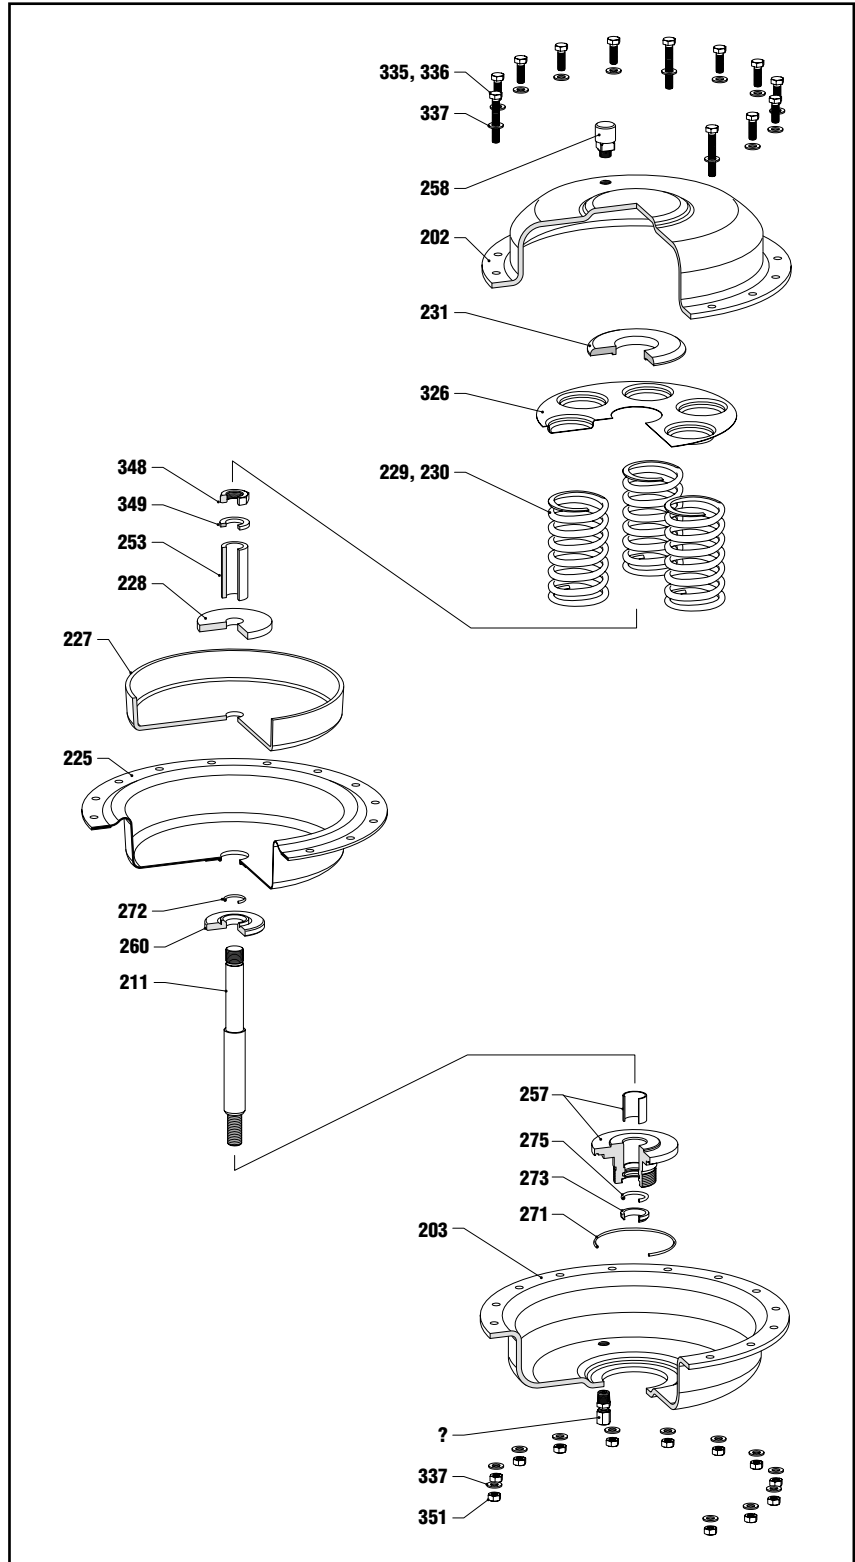

**Figure 23**

# FlowTop Control Valves

## Actuator Dimensions and Weights

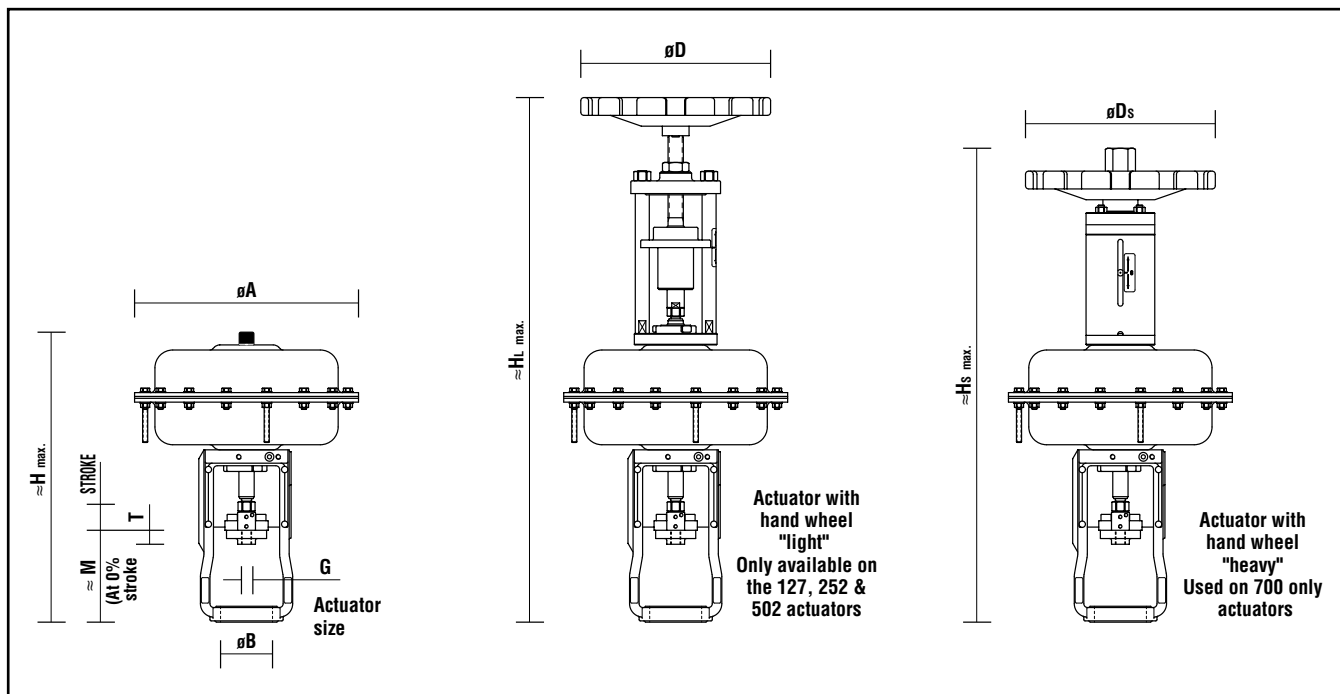


Figure 24: Single-seat Trim

Table 10: Dimensions and Weights

Designation	Actuator Size	19 in <sup>2</sup> (127 cm <sup>2</sup> )		39 in <sup>2</sup> (252 cm <sup>2</sup> )		78 in <sup>2</sup> (502 cm <sup>2</sup> )				109 in <sup>2</sup> (700 cm <sup>2</sup> )			
	Stroke	0.8		0.8		0.8		1.6		0.8		1.6	
		in	cm	in	cm	in	cm	in	cm	in	cm	in	cm
$\phi A$		7.8	178	10.4	254	13.9	330	13.9	330	15.9	381	15.9	381
H max.		12.6	305	13.2	330	17.9	432	18.1	457	21.5	533	21.7	533
Hs max.		-	-	-	-	-	-	-	-	34.3	864	34.4	864
H <sub>L</sub> max.		23.2	584	23.4	584	33.3	838	34.3	864	-	-	-	-
$\phi Ds$ max.		-	-	-	-	-	-	-	-	13.8	330	13.8	330
$\phi DL$ max.		7.9	178	7.9	178	11.8	279	11.8	279	-	-	-	-
Actuator	Weight	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg
		20	9	31	14	64	29	64	29	88	40	88	40
	With top mounted hand wheel "heavy"	-	-	-	-	-	-	-	-	12	5	12	5
	With top mounted hand wheel "light"	31	14	42	19	79	36	79	36	-	-	-	-

Table 11: Yoke Dimensions

Designation	Actuator Size	19 in <sup>2</sup> (127 cm <sup>2</sup> )		39 in <sup>2</sup> (252 cm <sup>2</sup> )		78 in <sup>2</sup> (502 cm <sup>2</sup> )				109 in <sup>2</sup> (700 cm <sup>2</sup> )			
	Stroke	20		20		20		40		20		40	
		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
$\phi B$		2.6	65	2.6	65	2.6	65	3.2	82	2.6	65	3.2	82
$\approx M$		4.1	105	4.1	105	4.1	105	5.5	140	4.1	105	5.5	140
G		M12		M12		M12		M16		M12		M16	
T		.91	23	.91	23	.91	23	.98	25	.91	23	.98	25



## FlowTop Control Valves

### Body Dimensions and Shipping Weights

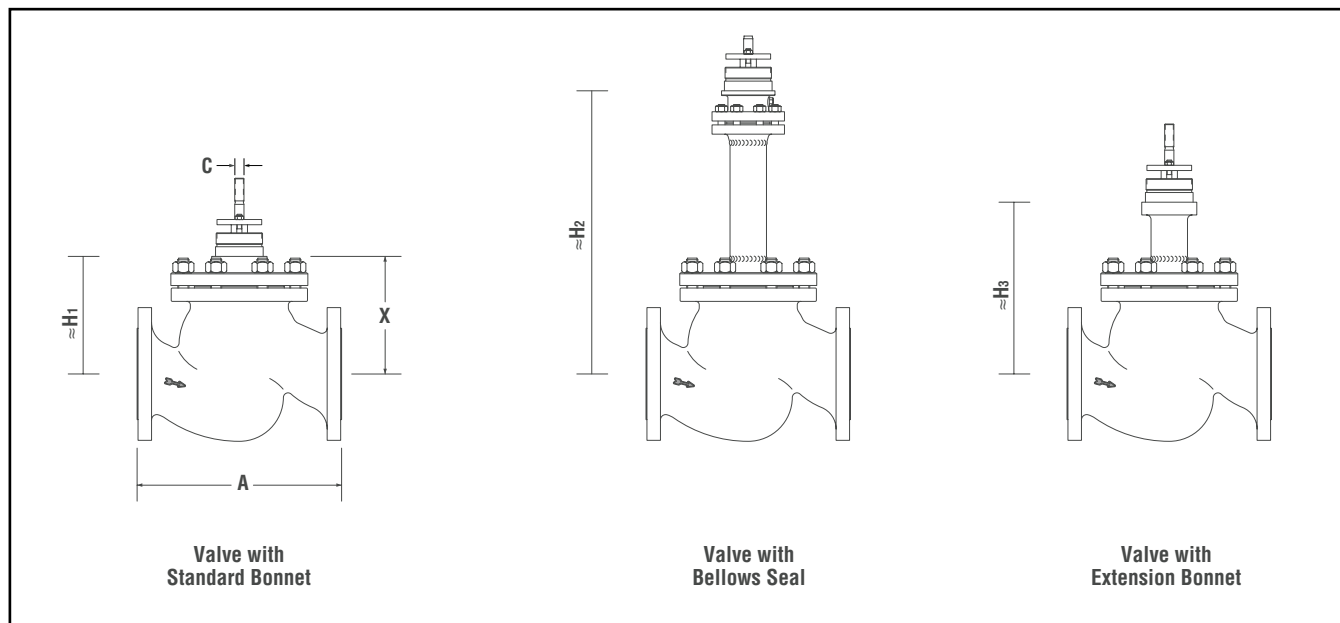


Figure 25: Single-seat Trim

Table 12: Dimensions

Valve Size	A Face to Face Dimensions				C				X Disassembly Clearance				≈H1 Standard Bonnet				≈H2 Bellows Seal				≈H3 Extended Bonnet			
	Class 150		Class 300		Class 150		Class 300		Class 150		Class 300		Class 150		Class 300		Class 150		Class 300		Class 150		Class 300	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
0.5	7.25	184.2	7.5	190.5	0.472	12	0.472	12	4.6	117	4.6	117	4.6	117	4.6	117	11.8	299	11.8	299	8.6	218	8.6	218
1	7.25	184.2	7.75	196.9	0.472	12	0.472	12	5.6	142	5.6	142	4.6	117	4.6	117	11.8	299	11.8	299	8.6	218	8.6	218
1.5	8.75	222.3	9.25	235	0.472	12	0.472	12	5.6	142	5.6	142	5.4	137	5.4	137	12.1	307	12	305	8.6	218	8.6	218
2	10	254	10.5	266.7	0.472	12	0.472	12	8.0	208	8.0	208	5.5	138	5.5	138	12.1	307	12	305	8.7	220	8.7	220
3	11.75	298.5	12.5	317.5	0.63	16	0.63	16	9.0	229	9.0	229	8	203	8	203	19.7	500	20	508	12.2	310	12.2	310
4	13.88	352.6	14.5	368.3	0.63	16	0.63	16	9.0	229	9.0	229	8.1	204	8	203	19.7	500	20	508	12.3	311	12.3	311

Table 13: Shipping Weights

Valve Size	≈ Weight for Valves											
	Standard Bonnet				Bellows Seal Bonnet				Extended Bonnet			
	Class 150		Class 300		Class 150		Class 300		Class 150		Class 300	
in	lbs	kg	lbs	kg	lbs	kg	lbs	kg	lbs	kg	lbs	kg
0.5	13.7	6.2	13.9	6.3	22.5	10.2	22.7	10.3	16.6	7.5	16.8	7.6
1	16.1	7.3	17.9	8.1	24.9	11.3	26.7	12.1	19	8.6	20.8	9.4
1.5	29.6	13.4	34.2	15.5	38.4	17.4	43	19.5	31.4	14.2	36	16.3
2	38.4	17.4	41	18.6	47.2	21.4	50	22.6	40.2	18.2	42.8	19.4
3	93	42	104	47	111	50	122	55	95	43	108	49
4	137	62	159	72	155	70	177	80	139	63	164	74

## FlowTop Control Valves

### Actuator Data

Table 14: Actuator Spring

Actuator Size		Stroke	Spring Code	Spring Range		Spring Color	Number of Springs	Spring Part Number
in <sup>2</sup>	cm <sup>2</sup>	mm		psi	bar			
19.4 in <sup>2</sup>	127 cm <sup>2</sup>	20 mm	A	3- 15	0.2-1.0	Blue	3	SMD-28602
			B	7-28	0.5-1.9	Blue	6	SMD-28602
			D	15-35	1.0-2.4	Red	3	SMD-28604
			F	29-70	2.0-4.8	Red	6	SMD-28604
			U	22-55	1.5-3.8	Blue	2	SMD-28602
			V	22-40	1.5-2.7	Red	4	SMD-28604
						Silver	6	SMD-37482
in <sup>2</sup>	cm <sup>2</sup>	mm		psi	bar			
38.8 in <sup>2</sup>	252 cm <sup>2</sup>	20 mm	A	3- 15	0.2-1.0	Blue	3	SMD-28605
			B	7-28	0.5-1.9	Blue	6	SMD-28605
			D	15-35	1.0-2.4	Red	3	SMD-28609
			F	29-70	2.0-4.8	Red	6	SMD-28609
			U	22-55	1.5-3.8	Blue	2	SMD-28605
			V	22-40	1.5-2.7	Red	4	SMD-28609
						Silver	6	SMD-37483
in <sup>2</sup>	cm <sup>2</sup>	mm		psi	bar			
77.5 in <sup>2</sup>	502 cm <sup>2</sup>	20 mm	A	3- 15	0.2-1.0	Blue	3	SMD-32097
			B	7-28	0.5-1.9	Blue	6	SMD-32097
			D	15-35	1.0-2.4	Red	3	SMD-32099
			F	29-70	2.0-4.8	Red	6	SMD-32099
			U	22-55	1.5-3.8	Blue	2	SMD-32097
			V	22-40	1.5-2.7	Red	4	SMD-32099
						Silver	6	SMD-37486
in <sup>2</sup>	cm <sup>2</sup>	mm		psi	bar			
77.5 in <sup>2</sup>	502 cm <sup>2</sup>	40 mm	A	3- 15	0.2-1.0	Blue	3	SMD-28610
			B	7-28	0.5-1.9	Blue	6	SMD-28610
			D	15-35	1.0-2.4	Red	3	SMD-28612
			F	29-70	2.0-4.8	Red	6	SMD-28612
			U	22-55	1.5-3.8	Blue	2	SMD-28610
			V	22-40	1.5-2.7	Red	4	SMD-28612
						Silver	6	SMD-37485
in <sup>2</sup>	cm <sup>2</sup>	mm		psi	bar			
109 in <sup>2</sup>	700 cm <sup>2</sup>	40 mm	A	3- 15	0.2-1.0	Blue	3	SMD-63752
			B	7-28	0.5-1.9	Blue	6	SMD-63752
			D	15-35	1.0-2.4	Red	3	SMD-63753
			F	29-70	2.0-4.8	Red	6	SMD-63753
			U	22-55	1.5-3.8	Blue	2	SMD-63752
			V	22-40	1.5-2.7	Red	4	SMD-63753
						Silver	6	SMD-63754

## FlowTop Control Valves

### Actuator Data

**Table 15: Actuator Specifications**

Description	Pneumatic Diaphragm Actuator (Spring-opposed or Springless)
Operating	Direct action: Air-to-close (air supply causes stem extension) Reverse action: Air-to-open (air supply causes stem retraction)
Signal or Spring Ranges	Standard: 3 to 15 psi (0.2 to 1.0 bar) Optional: 12 to 31 psi (0.8 to 2.2 bar)
Travel Indication	Pointer and graduated scale
Environmental Temperature	Standard: 40° to 176° F (-40° to 80° C)
Air Connections	Standard: 0.25-inch NPT female
Finish (casing)	Powder painted diaphragm halves. High temperature silicon painted yoke.
Options on Request * check factory	Screws, nuts, diaphragm casings, etc. in stainless steel <ul style="list-style-type: none"> <li>• Finish resistant to seawater or tropical environment</li> <li>• Other spring ranges</li> <li>• Special paints: Epoxy, offshore high temperature</li> </ul>

**Table 16: Maximum Supply Pressure**

Model	psi	bar
19 in <sup>2</sup> (127 cm <sup>2</sup> )	90	6
39 in <sup>2</sup> (252 cm <sup>2</sup> )	90	6
78 in <sup>2</sup> (502 cm <sup>2</sup> )	90	6
109 in <sup>2</sup> (700 cm <sup>2</sup> )	90	6

# FlowTop Control Valves

## Model Codes

Type	Size	Class	Body/Cert.	Plug	Seat	k <sub>v</sub> s	Trim	Actuator	S
V740 DFNVA	2 inches	300	A216 WCB/00	PN1GG	42	46	316 SS		

<b>Valve Model</b> ANSI 150 V738 ANSI 300 V740									
<b>Body Form</b> Three flange D									
<b>Form of Connection</b> Flange acc. to ANSI B16.5 Form RF F									
<b>Bonnet Form</b> Without pressure balancing V									
<b>Bonnet Assembly</b> Standard bonnet N Bellows seal bonnet F Extension bonnet R									
<b>Packing Box Assembly</b> PTFE rings, adjustable, BAM A Pure graphite rings, adjustable, BAM B PTFE rings, loaded, BAM N Pure graphite rings, loaded, BAM O PTFE rings, graphite core, load., "TA" Q PTFE rings, oil lubricated, load., "TA" R V-ring packing S									
Normal size 1/2 to 4 inches									
ANSI Class 150 150 ANSI Class 300 300									
Body material A216 WCB A351 CF8M									
<b>Material Certificate</b> Without O. acc. EN 10 204 - 2.2Z Z. acc. EN 10 204 - 3.1B B.									
<b>Pressure and Leakage Certificate</b> Without .O acc. EN 10 204 - 2.2Z .Z acc. EN 10 204 - 3.1B .B Automatic safety valve - PED cat. IV .K									
							316 SS	Plug, seat material	
							400 SS	Plug, seat material	
							c <sub>v</sub> - value	0.012 - 208	
							Port size	4 to 100	
							Flow tends to open valve	G	
							<b>Characteristic</b> Equal percentage G Linear L On/off A		
							<b>Plug Guidance</b> Top 1		
							<b>Plug Type</b> Standard N Partial Alloy 6 D Full Alloy 6 K Soft seated W Hardened H		
							<b>Plug</b> Contoured plug P Contoured plug with Silent Pac K Disk Plug (On/Off)		

## FlowTop Control Valves

### Model Codes

SMD IT 252 BVOZA

#### Stroke Length

20 mm (.5 to 2 inch) valves	A
40 mm (3 and 4 inch) valves	B

#### Operation\* Air Failure

Stem retracted – fail open	A
Stem extended – fail closed	Z

Without hand wheel	O
With top mounted hand	L
Wheel "light" (125, 250 and 500 only)	
With top mounted hand	H
Wheel "heavy" 700 only	

#### Spring Ranges (not adjustable)

0.2-1.0 bar (3-15 psi)	A
0.5-1.9 bar (7-28 psi)	B
1.0-2.4 bar (15-35 psi)	D
1.5-3.8 bar (22-55 psi)	U
1.5-2.7 bar (22-40 psi)	V
2.0-4.8 bar (29-70 psi)	F

#### Actuator Color

White	B
-------	---

#### Actuator Size

127 cm <sup>2</sup> (19 in <sup>2</sup> )	IT
252 cm <sup>2</sup> (39 in <sup>2</sup> )	
502 cm <sup>2</sup> (78 in <sup>2</sup> )	
700 cm <sup>2</sup> (109 in <sup>2</sup> )	

\*Definition according to VDI/VDE 3844 - Draft is only possible in conjunction with the control valve.

Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can (and often does) provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Operation Maintenance (IOM) instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications presented in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any of its worldwide operations or offices.

For more information, contact:

For more information about Flowserve and its products, contact [www.flowserve.com](http://www.flowserve.com) or call USA 972 443 6500.

#### Manufacturing Facilities

1350 N. Mt. Springs Prkwy.  
Springville, UT 84663  
Phone 801 489 8611  
Facsimile 801 489 3719

1300 Parkway View Drive  
Pittsburgh, PA 15205 USA  
Telephone 412 787 8803  
Facsimile 412 787 1944

Manderscheidstr. 19  
45141 Essen, Germany  
Telephone (49) 2 01 89 19 5  
Facsimile (49) 2 01 891 9600

7, Avenue de la Libération, B.P. 60  
63307 Tiers Cedex, France  
Telephone (33 4) 60 73 80 42 66  
Facsimile (33 4) 73 80 14 24

Kasernengasse 6  
A-9500 Villach, Austria  
Telephone (43) 4242 41181  
Facsimile (43) 4242 41181-50

#### Quick Response Centers

5114 Railroad Street  
Deer Park, TX 77536 USA  
Telephone 281 479 9500  
Facsimile 281 479 8511

